

## **USAGE INSTRUCTIONS**

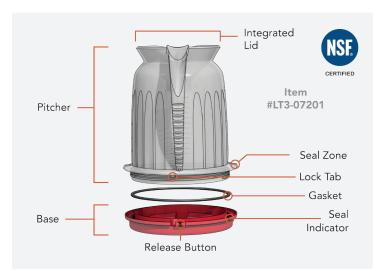

# **CrewSafe®**

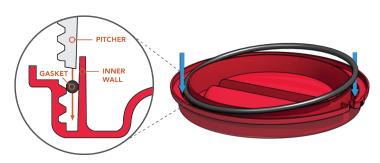


#### GASKET MUST BE USED.

Place gasket around inner wall of base.

The gasket will move into the appropriate position when the base is threaded onto the pitcher.

#### **TO ASSEMBLE**



Align release button with ridges as shown. Rotate base past lock tab (listen for audible "click"). Tighten base until seal indicator is within the seal zone.





Base should be flat against the pitcher with no gap.

#### TO DISASSEMBLE



Press release button with thumb while rotating base with other hand.

Not a storage device. Use only for transport of hot liquids up to 212°F/100°C.

#### **TO FILL**



Align center of pitcher with the fill spout. Do not fill past 3 quarts.

#### **TO TRANSPORT**



Use two hands; one on the handle & one on the ridges.

Bottom will be hot to touch.

Wear approved PPE.

#### **TO WASH**



Sanitizer & dishwasher safe. Only use detergents with neutral pH and never use bleach.

### TO DRY



Leave upside down to drain completely & dry. One side is raised to aid with drainage.

0

Training video available on the Videos tab at spellboundinc.com/redhotpitcher

crewsafe.com | info@crewsafe.com |

888.331.9001